

TOSHIBA *IK-M51series*



Introducing Toshiba's versatile, powerful new 1-CCD micro camera system with 1/2" and 1/3" CCD heads consisting of:


- IK-CU51 Camera Control Unit
- IK-M51H 1/2" 17mm dia. Camera
- IK-UM51H 1/3" 12mm dia. Camera

The system delivers excellent image resolution, while its compact dimensions provide for greater flexibility in mounting choices.

Broadcast, endoscopy, microscopy, diving, security, machine vision, aviation and education are just some of its many applications.

features

- Compact, lightweight, easy to install
- Choice of 1/2" or 1/3" camera head
- 470 TV line resolution on both heads
- RS-232C allows PC Control of CCU
- 1/50 to 1/10,000 Sec. Electronic Shutter
- Excellent low-light performance
- Good range of lenses
- Special C-mount adaptor for 1/2"

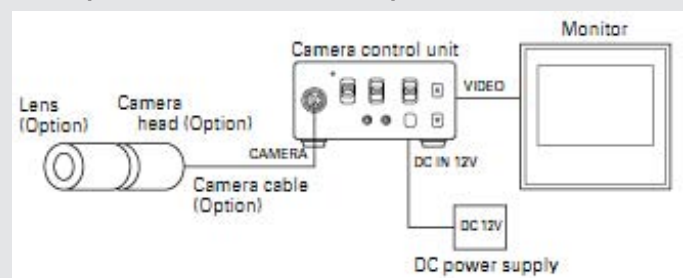

OFFICIAL DISTRIBUTOR FOR **TOSHIBA**

IK-M51

specifications

N.B. Where different 1/3" camera specifications are given in **RED**

Power Supply	12 V DC \pm 0.5V (use AC-M601E for medical applications)
Power Consumption	360 mA
Image Sensor	1/2" (IK-M51H); 1/3" (IK-UM51H)
Effective Pixels	Horizontal: 752 Pixels, Vertical: 582 Pixels
Effective Image Area	H: 6.47mm, V: 4.83mm (1/2"); H: 4.89mm, V: 3.64mm (1/3")
Scanning System	2:1 Interlace
Scan Frequency	Horizontal: 15.625 kHz, Vertical: 50Hz
Sync System	Internal/External (automatic switching)
Resolution	Horizontal: More than 470 lines, Vertical: More than 420 lines
Standard Intensity of Illumination for objects	30 lx (F1.6, 3000K)
Minimum Intensity of Illumination for objects	2.5lx (F1.6, 3000K)
S/N Ratio	46dB or more
Video Output	VBS 1.0 V (p-p), (BNC terminal) PAL System Y/C separation output (S terminal)
Output Impedance	75 ohms unbalanced
External Sync Input	VBS 1.0 V (p-p), (BNC terminal) PAL 75 Ohm unbalanced
Adjustment function	Subcarrier phase, H phase
White Balance	Automatic/set/manual
Gain Switch (AGC)	SENS UP (+6 dB)/ON/OFF
Electronic Shutter	Automatic, 1/50s, 1/100s, 1/250s, 1/500s, 1/1000s, 1/2000s, 1/4000s, 1/10000s, synchronized scan
Operating Temperature / Humidity	-10° C to +40° C (14°F to 104°F) / Less than 90%
Anti-vibration/shock Characteristics	70 m/s ² (10 to 200 Hz) / 700 m/s ²
Weight (CCU)	390g (0.86 lbs)
(Camera 1/2", 1/3")	18g (0.6 oz); 10g (0.33 oz)
Dimensions (CCU body)	W: 85mm, H: 40mm, D: 156mm (W: 3.35", H: 1.57", D: 6.14")
(Camera 1/2", 1/3")	Length 38.9mm, Dia 17mm; Length 36mm, Dia 12mm

Lens IK-UM51H (1/3")

Part No.	Focal Length	F No.
JKL-03U	3.0	2.0
JKL-55U	5.5	1.6
JKL-11U	11.0	2.0
JKL-18U	18.0	3.3

Lens IK-M51H (1/2")

JKL-03M	3.0	1.8
JKL-04M2	4.5	2.0
JKL-7.5M	7.5	1.6
JKL-15M	15.0	2.0
JKL-24M2	24.0	3.1
LA-002	Special C-mount adaptor (1/2" CCD only)	


NTSC standard also available (IK-M44)

Design and specifications are subject to change without notice

Camera cables

Part No.	Length	Diameter
EXC-4302	2	5.0mm
EXC-4303	3	5.0mm
EXC-4305	5	5.0mm
EXC-4312	12	5.0mm
EXC-4320	20	5.0mm
EXC-4330	30*	5.0mm
EXC-4354	54*	5.0mm

* IK-M51H only

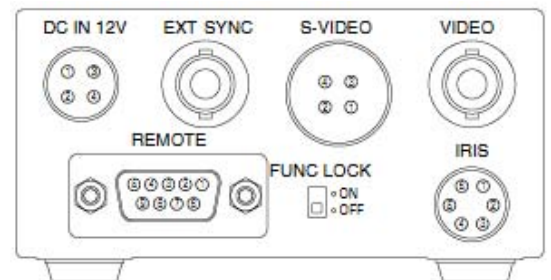

Polecam Ltd

10 Sunbeam Road, Woburn Road Industrial Estate, Kempston, Bedford, MK42 7BY, England
 Tel: +44 (0)1234 855222 Fax: +44 (0)1234 855270 Email: info@polecam.com www.polecam.com